

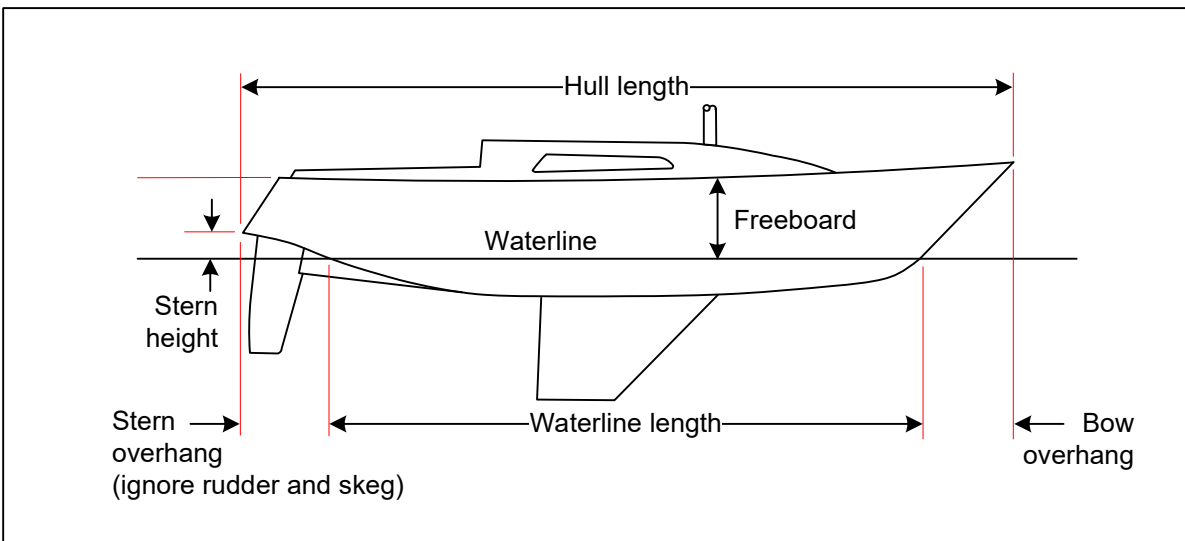
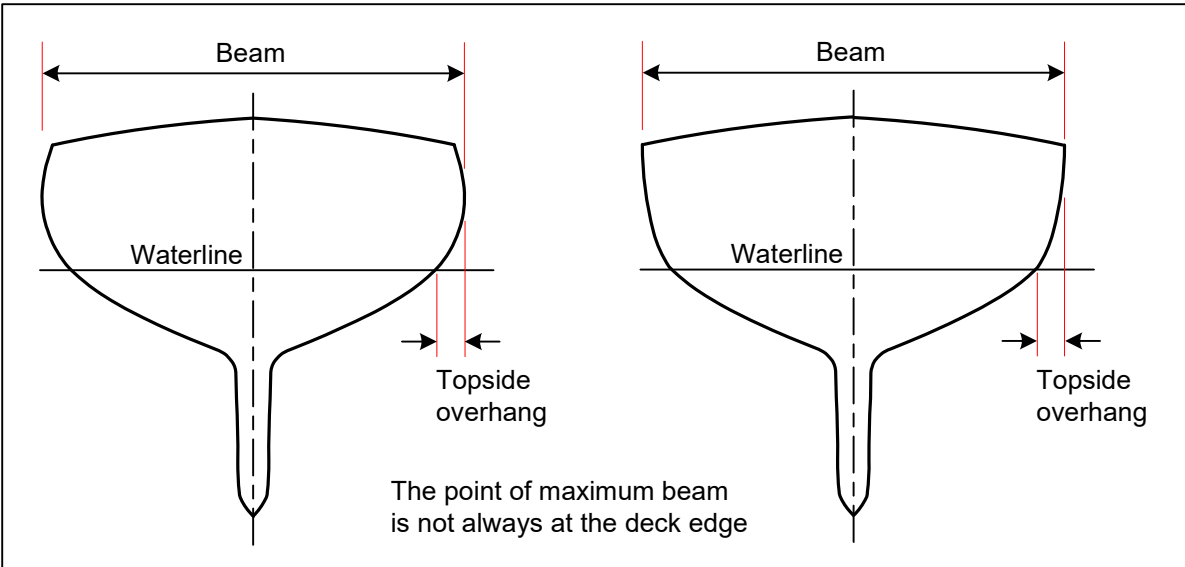
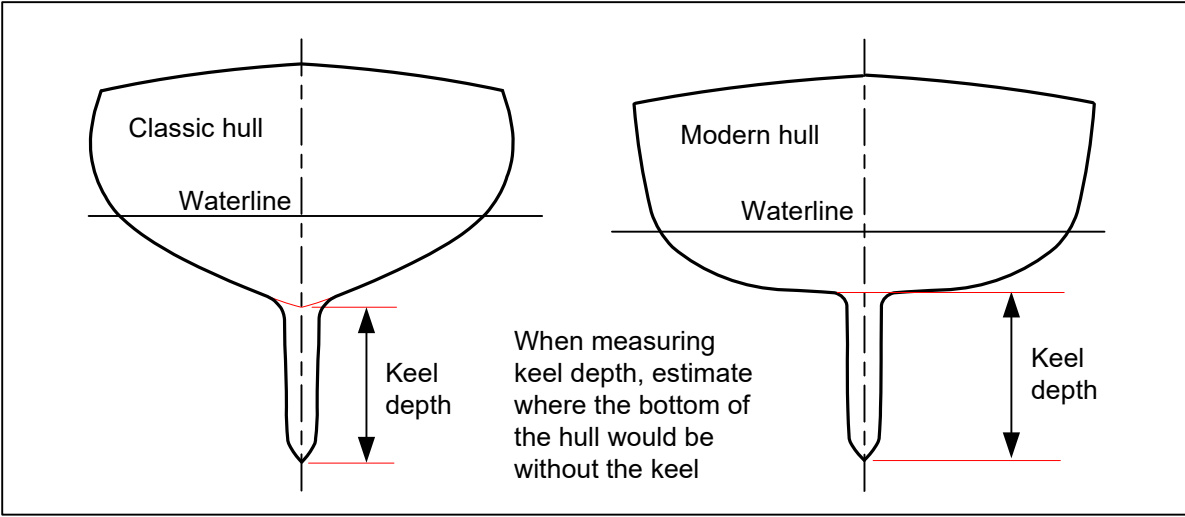
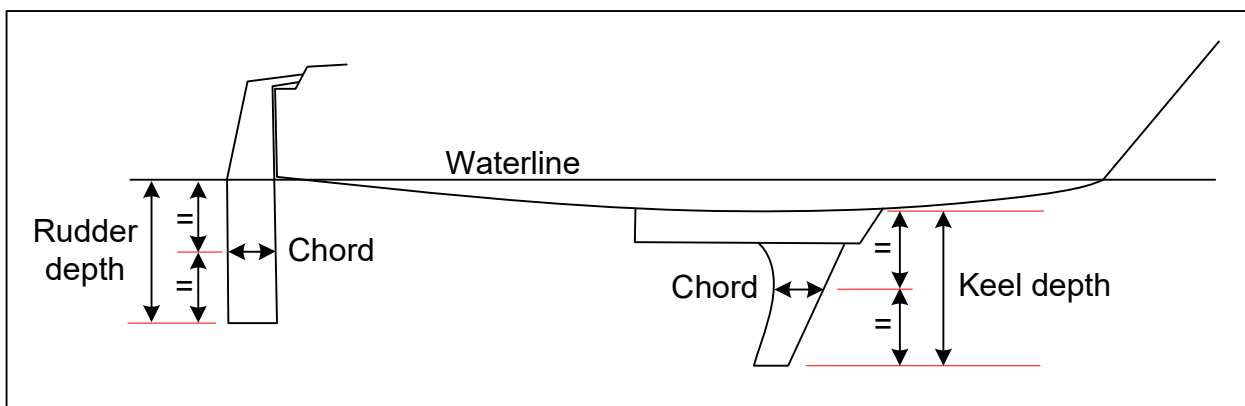
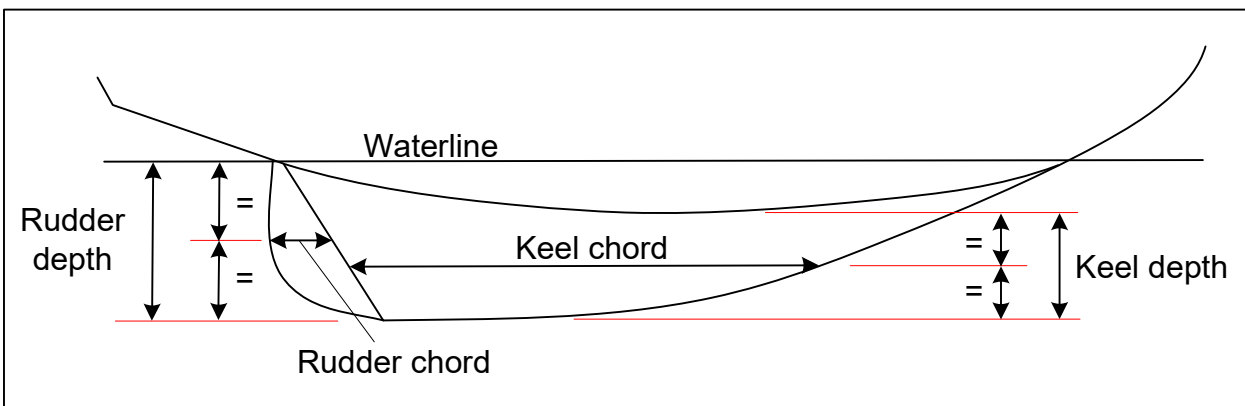


# VPRS - keel depth, beam, length and overhangs

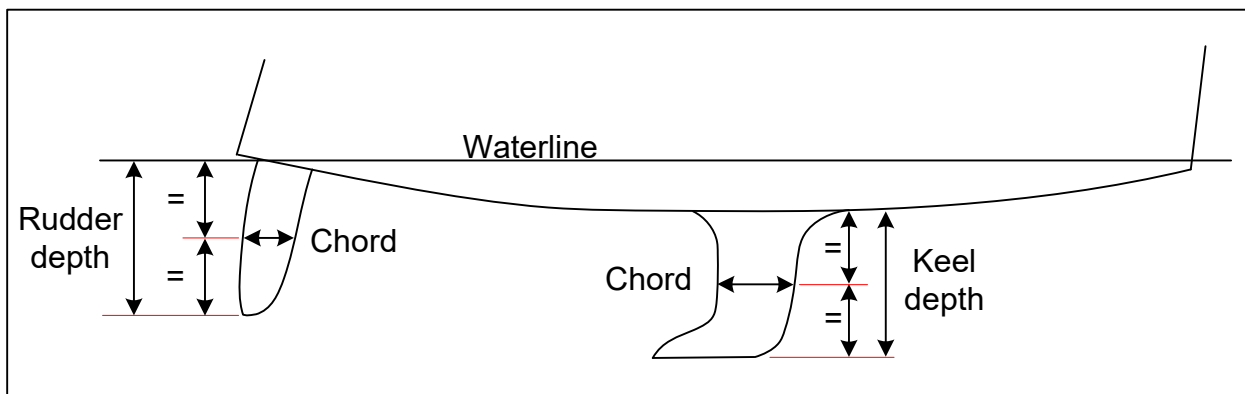

# VPRS - keel and rudder measurements

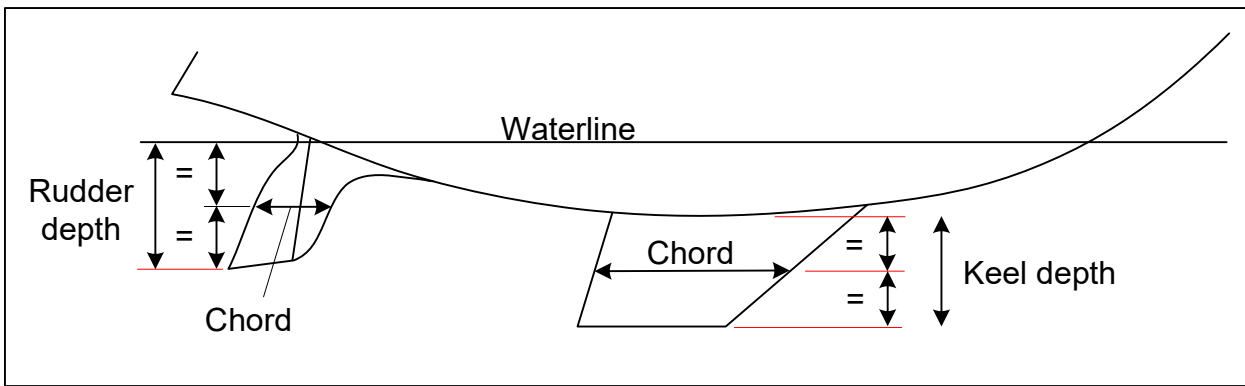


# VPRS - rig measurements and mainsail


## Black bands

Mainsail hoist and foot are measured to the lower / inner edge of black bands on the mast / boom.

If not present, then measure to the full extent of hoist and the end of the boom.

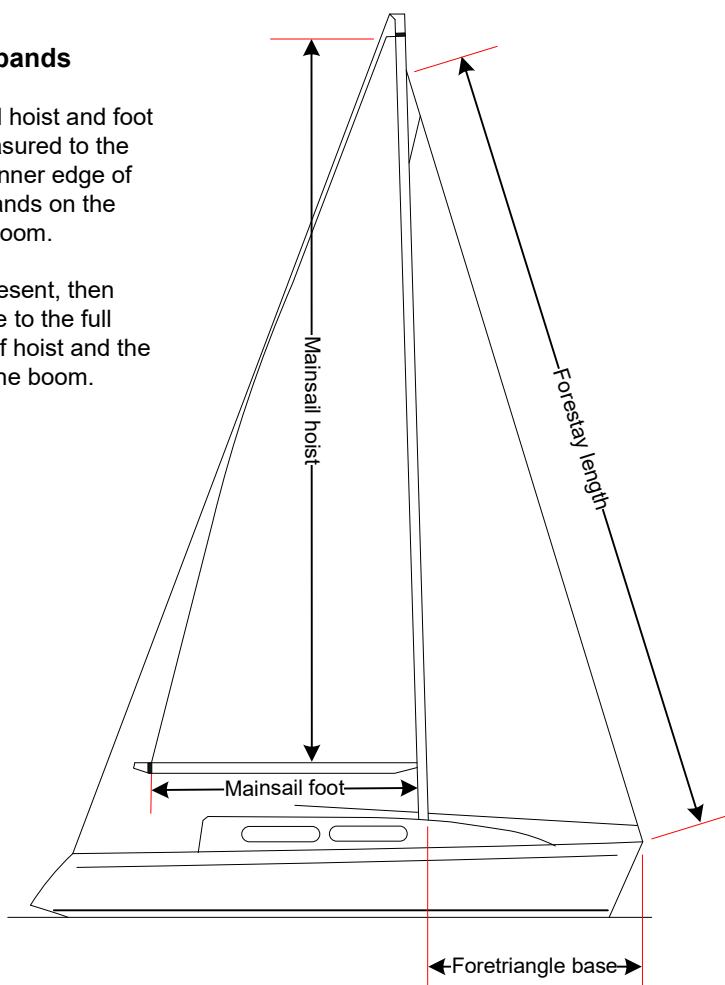

- C) Fold head to 3/4 leech point to find 7/8 leech point
  - B) Fold head to 1/2 leech point to find 3/4 leech point
  - A) Fold head to clew to find half leech point
- 1) Find the leech points and mark them with a pencil
  - 2) Lay the sail out flat again
  - 3) Measure the widths as the shortest distances from leech points to luff

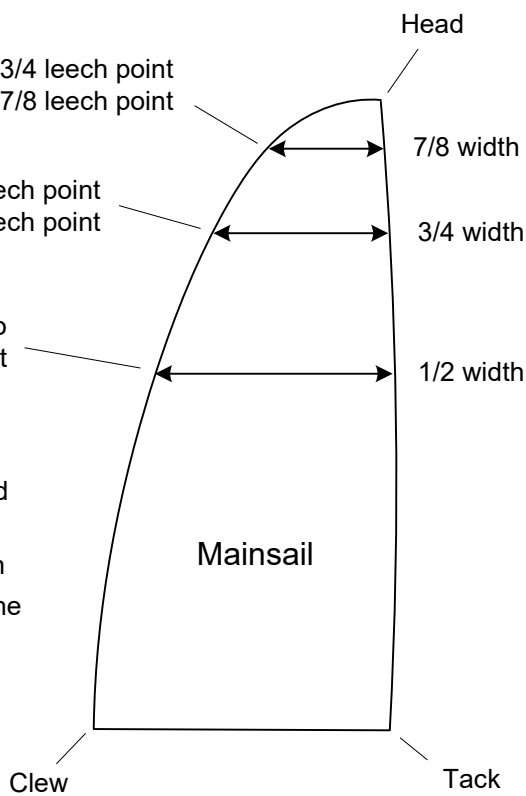

# VPRS - upwind and downwind headsails

